



Plant Monitoring
Sunny WebBox with Bluetooth® Wireless Technology
 Quick Introduction for Commissioning



SWebbox20-SE-BUS103410 | 98-0029110 | Version 1.0

EN

SYSTEM REQUIREMENTS

Operating system:

- Microsoft Windows 7
- Microsoft Windows Vista
- Microsoft Windows XP SP2
- Linux with Kernel as of Version 2.6.12* (KDE)
- MacOS as of Version 10.6*

* with Sun Java Runtime Environment (JRE) as of Version 6

Recommended screen resolution:

1,024 pixel x 768 pixel

Web browser:

- Internet Explorer Version 8 and higher
- Firefox Version 3.6 and higher


A PREPARATION

This quick introduction will guide you through the commissioning stages of your Sunny WebBox with Bluetooth with the help of the Sunny WebBox Assistant.

Download the Sunny WebBox Assistant from www.SMA-America.com. Make sure that all the SMA Bluetooth devices of your PV plant have been set and put into operation with the same NetID. Your installer will inform you which NetID is applicable.



Identify the ideal installation/mounting location for the Sunny WebBox with Bluetooth using the Sunny Explorer software or a Sunny Beam with Bluetooth. Note the remarks in the installation guide of the Sunny WebBox with Bluetooth on the mounting location.

C COMMISSIONING THE SUNNY WEBBOX

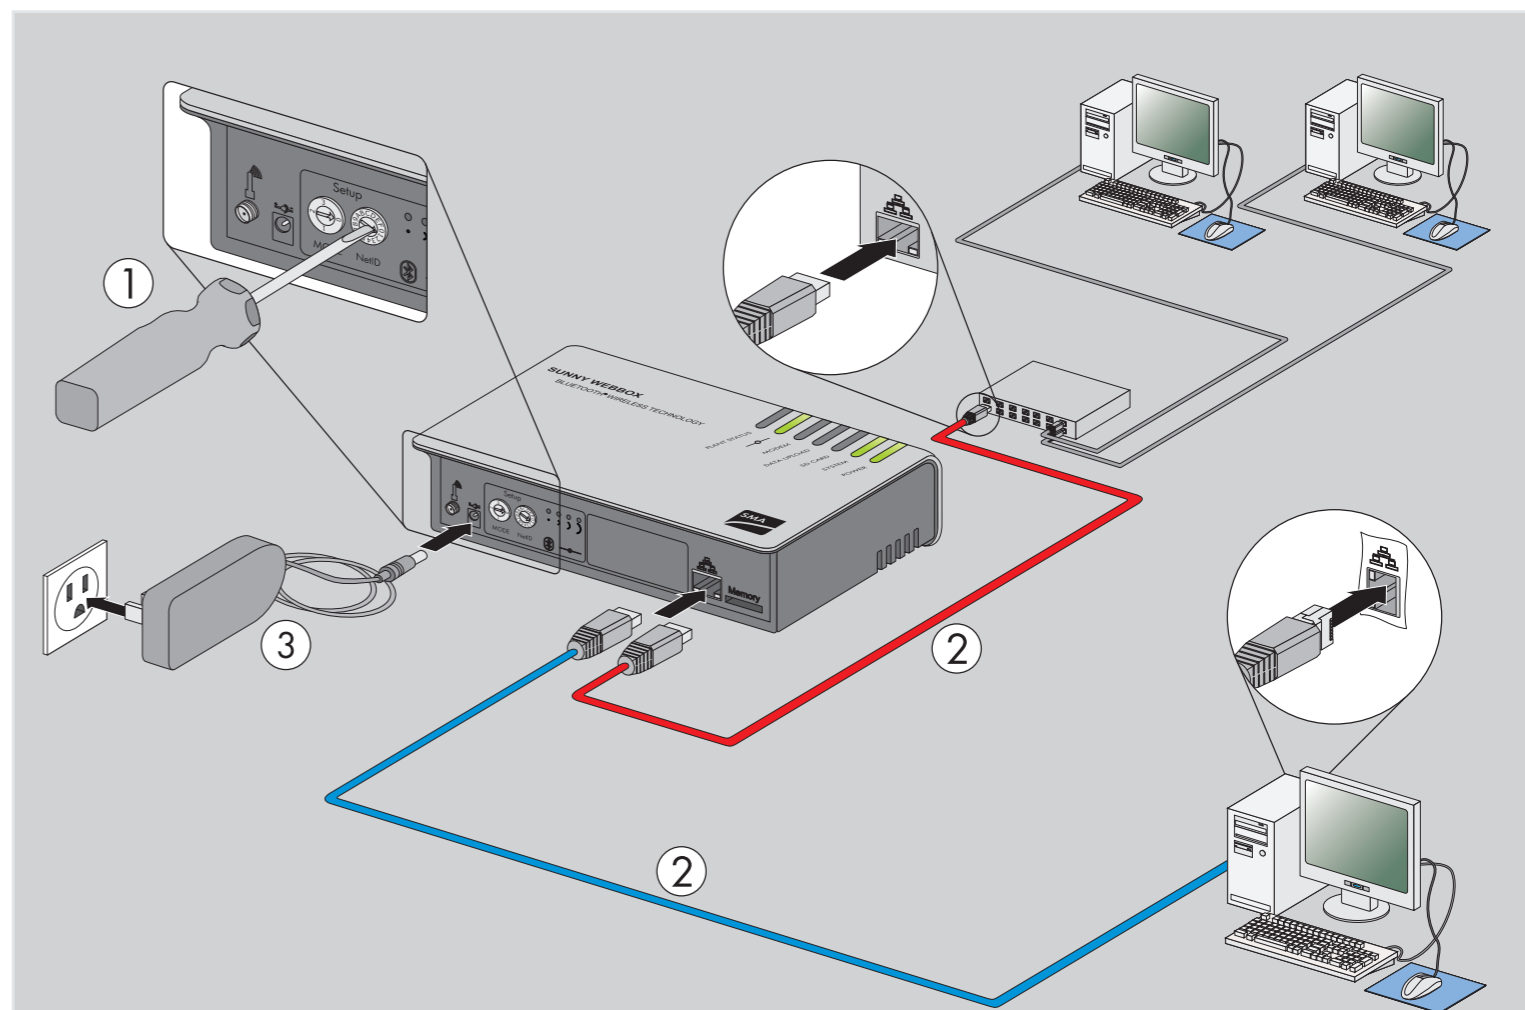


B UNPACKING

For commissioning you will need the following parts:

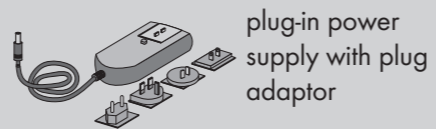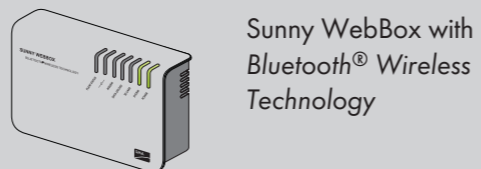

- 1 Set the NetID of your PV plant in the Sunny WebBox.
 - 2 Connect the Sunny WebBox and a node (e.g., router, switch, hub) using the red network cable (recommended).
or
Connect the Sunny WebBox directly to the computer using the blue network cable.
 - 3 Connect the plug-in power supply to the Sunny WebBox and plug it into a socket.
- As soon as the „SYSTEM“ and „POWER“ LEDs glow green, the Sunny WebBox has started up and is ready for operation. The start-up procedure can take up to 90 seconds.



If either of the „SYSTEM“ or „POWER“ LEDs is not glowing green, read section „TROUBLESHOOTING“.

D STARTING THE SUNNY WEBBOX ASSISTANT

i Activate JavaScript in the Web browser
The user interface of the Sunny WebBox and the Sunny WebBox Assistant needs JavaScript in order to be able to display and execute contents and functions correctly. Activate JavaScript in your web browser. If necessary, read the „help“ section of the web browser.


i Put all nodes into operation.
If you wish to integrate the Sunny WebBox in a local network without the Dynamic Host Configuration Protocol (DHCP), put all the nodes of your local network into operation. The Sunny WebBox Assistant will support you in assigning a free IP address.

- 4 Download the Sunny WebBox Assistant from www.SMA-America.com.
- 5 Execute the relevant start file of the Sunny WebBox Assistant for the operating system you are using:

Operating system	Start file for the Sunny WebBox Assistant
Microsoft Windows 7, Microsoft Windows Vista, Microsoft Windows XP SP2	Sunny-WebBox-Assistant.exe
Linux*, MacOS*	Sunny-WebBox-Assistant.jar


* with Sun Java Runtime Environment (JRE) as of Version 6

- The Sunny WebBox Assistant opens in the web browser.

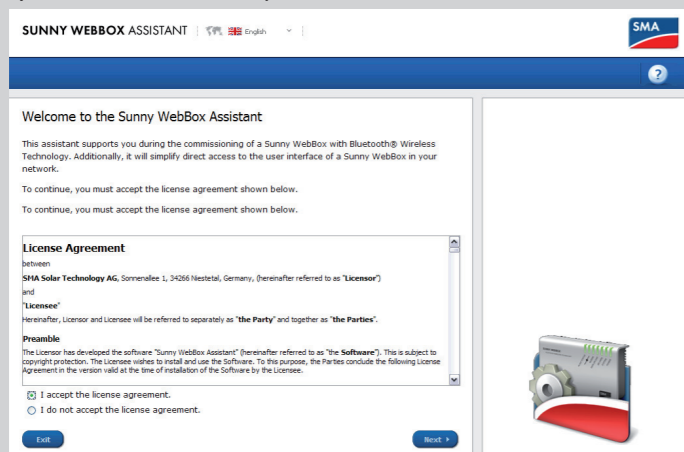

- If the Sunny WebBox Assistant does not open automatically, refer to section „TROUBLESHOOTING“.


E MENU OVERVIEW

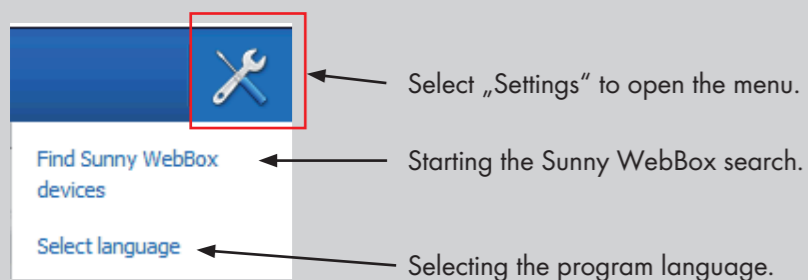

F SUNNY WEBBOX SEARCH

- 6 Accept license agreement and select [Continue].
- 7 If the Sunny WebBox is not yet connected: Connect the Sunny WebBox and select [Continue].

- The Sunny WebBox Assistant starts searching for Sunny WebBox devices in your network.

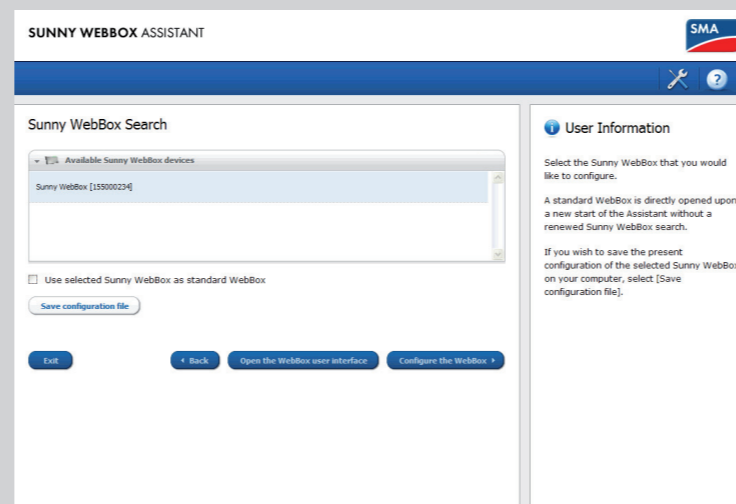

- If you do not find your Sunny WebBox, see section „TROUBLESHOOTING“.

G CONFIGURING SUNNY WEBBOX

- 8 Select the Sunny WebBox to be configured.
 - 9 Select [Configure WebBox].
- The Sunny WebBox Assistant leads you through the basic settings of the Sunny WebBox. Follow the instructions in the Sunny WebBox Assistant.

- 1 Sunny WebBox login
- 2 Installation type
- 3 System settings
- 4 Network settings
- 5 Data settings
- 6 Summary and transfer of the Sunny WebBox configuration

H TROUBLESHOOTING

The „POWER“ LED is off

- The Sunny WebBox power supply is not active. Check the power supply to the Sunny WebBox.

The „SYSTEM“ LED is blinking red

- To reconnect the Sunny WebBox, remove the plug-in power supply of the Sunny WebBox from the socket and reinsert it after a short time.
- If the problem is not resolved after a restart, contact the SMA Serviceline.

The Sunny WebBox Assistant does not open.

Error message: <http://localhost:4145/s/init>

- There is no standard web browser installed on your operating system. Install a standard web browser on your operating system. If necessary, read the "help" section of the operating system manual.
- There is no web browser installed. Install a supported web browser on your operating system. See section „System requirements“ for details.

The Sunny WebBox Assistant does not find the Sunny WebBox.

- It is possible that IPv6 is not supported by other network components (e.g., proxy server, WLAN router). Connect the Sunny WebBox via the blue network cable directly to the computer and carry out the search again.
- The Sunny WebBox is located in another network zone which cannot be accessed. Connect the Sunny WebBox via the blue network cable directly to the computer and repeat the search.
- A firewall is blocking the Sunny WebBox connection. During commissioning, deactivate the firewall or permit the required connection (protocols: HTTP, UDP at Port 80). If necessary, read the firewall "help" section. Then repeat the search.

IPv6 cannot be activated in Windows XP.

- You need administration rights for your computer. After activation, restart the computer and start the Sunny WebBox Assistant again.
- Activate IPv6 in Windows XP SP2 manually (see user manual of the Sunny WebBox).

CONTACT

If any technical problems occur with the Sunny WebBox with Bluetooth® or the Sunny WebBox Assistant, please the SMA Serviceline. The following information is required in order to provide you with the necessary assistance:

- Operating system
- Firmware version of the Sunny WebBox
- Software version of the Sunny WebBox Assistant

SMA Solar Technology America, LLC

6020 West Oaks Blvd
Rocklin, CA 95765
Tel. +1 916 625 0870
Tel. +1 877-MY SMA TECH
Tel. +1 877 697 6283 (Toll free, available for USA, Canada and Puerto Rico)
Fax +1 916 625 0871
Service@SMA-America.com
www.SMA-America.com