



SolarRoofs "Skyline" 10-01 and 20-01 Solar Collectors: These rugged, powerful 10 and 20 Square foot collectors weigh only 19 and 38 pounds. They are easy to carry by one person and are much safer to get on the roof to install. They are available in architectural colors and have an attractive appearance on the roof. No soldering is required to install the collector (s).

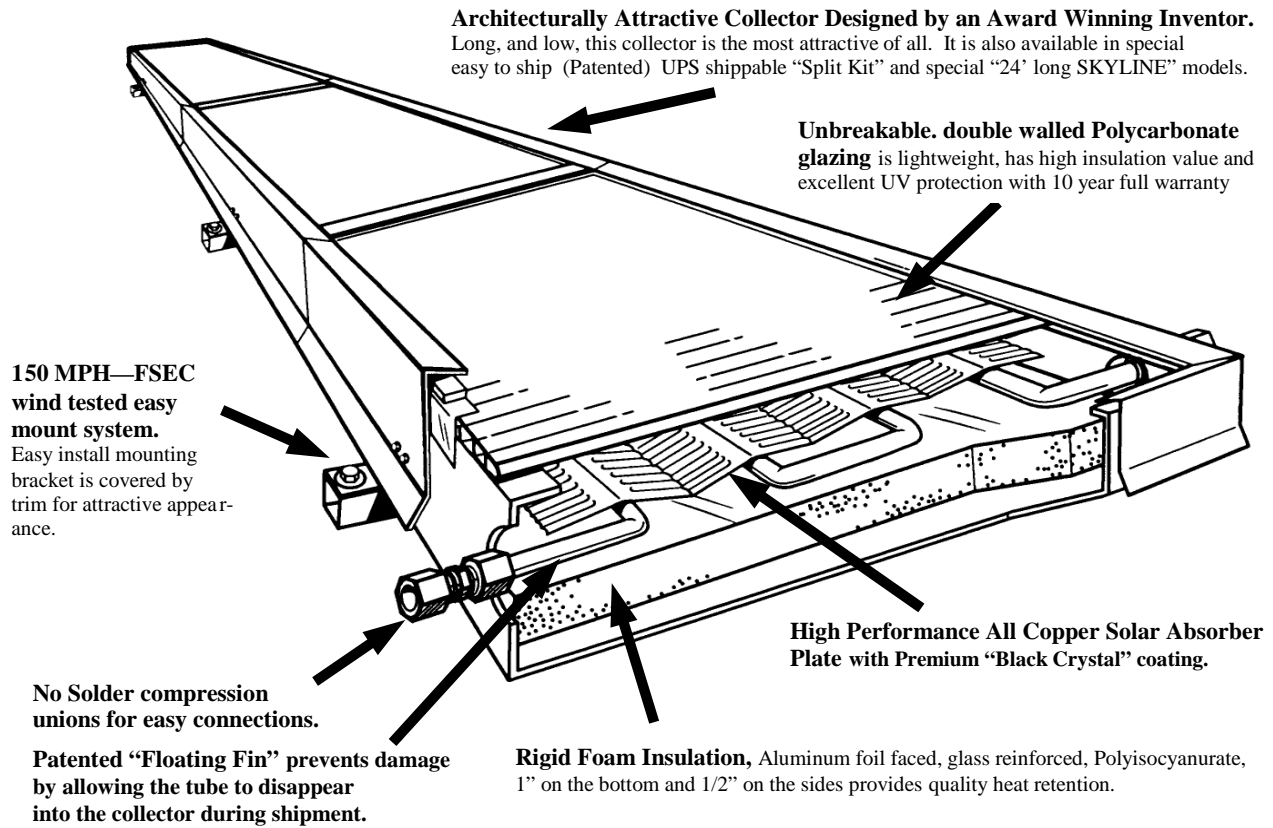

COLLECTOR SPECIFICATIONS:

Trim & Frame Materials: Finished 27 mil Aluminum Trim and Frame = Total 54 mil (1.37 mm)
 Absorber Material: "Black Crystal" or Black Chrome coated absorber with all copper 1/2" od tube
 Glazing: Twinwall Polycarbonate UV Treated .236" (6.0 mm)
 Dimension / Weight: 72" / 144.1"x 20"x 3" 19 / 38 lb = 1.9 lb. s/f (3.67 m x 0.51 m x 0.076 m 17.24 Kg) 18.4 net s/f (1.71 m²)
 Recommended Flow Rate: .20 to .6 GPM
 Maximum Working Pressure: 150 PSI (10.21 atm) Maximum Stagnation Temp: 250 °F (121.11 °C).
 Heat Transfer Fluid: Potable water or Propylene glycol - Fluid Capacity: 10-01 = .15 gal. / 20-01 = .3 gal.
 Standard Components: Mounting Ell brackets with tech screws and 2 1 1/4" washers.
 Color: Standard: Musket Brown or Dove Gray. Optional trim colors are available.

SolarRoofs 20-01 SRCC OG 100 Collector Rating:

SOLAR COLLECTOR CERTIFICATION AND RATING		COLLECTOR THERMAL PERFORMANCE RATING			
		Thousands of Btu Per Panel Per Day			
CERTIFIED SOLAR COLLECTOR		CATEGORY (Ti-Ta)	CLEAR DAY 2000 Btu/ft ² -d	MILDLY CLOUDY 1500 Btu/ft ² -d	CLOUDY DAY 1000 Btu/ft ² -d
 SRCC OG-100	SUPPLIER: ACR Solar International 5840 Gibbons Dr. Suite G Carmichael, CA 95608 MODEL: Fireball Fireball 2001 COLLECTOR TYPE: Glazed Flat-Plate CERTIFICATION #: 100-2001-002A	A (-9 °F)	23	17	12
		B (9 °F)	20	15	9
		C (36 °F)	17	11	6
		D (90 °F)	10	6	1
		E (144 °F)	6	2	

Web: www.SolarRoofs.com Email: richsolar@aol.com Phone: (916) 481-7200
Fax: (916) 481-7203 Address: 5840 Gibbons Drive Suite G, Carmichael CA 95608