



Assembly Sheet - CP-SQ-Slotted

1. Installation to be completed in accordance with manufacturer's written specifications and installation instructions.
2. See spec sheet or contact manufacturer for detailed material, finishes, and configuration options.
3. Contact manufacturer for detailed layout.
4. Do not scale drawings.
5. Subject to change without notice.

**** Numbers 1,3,4,6
SOLD SEPARATELY**

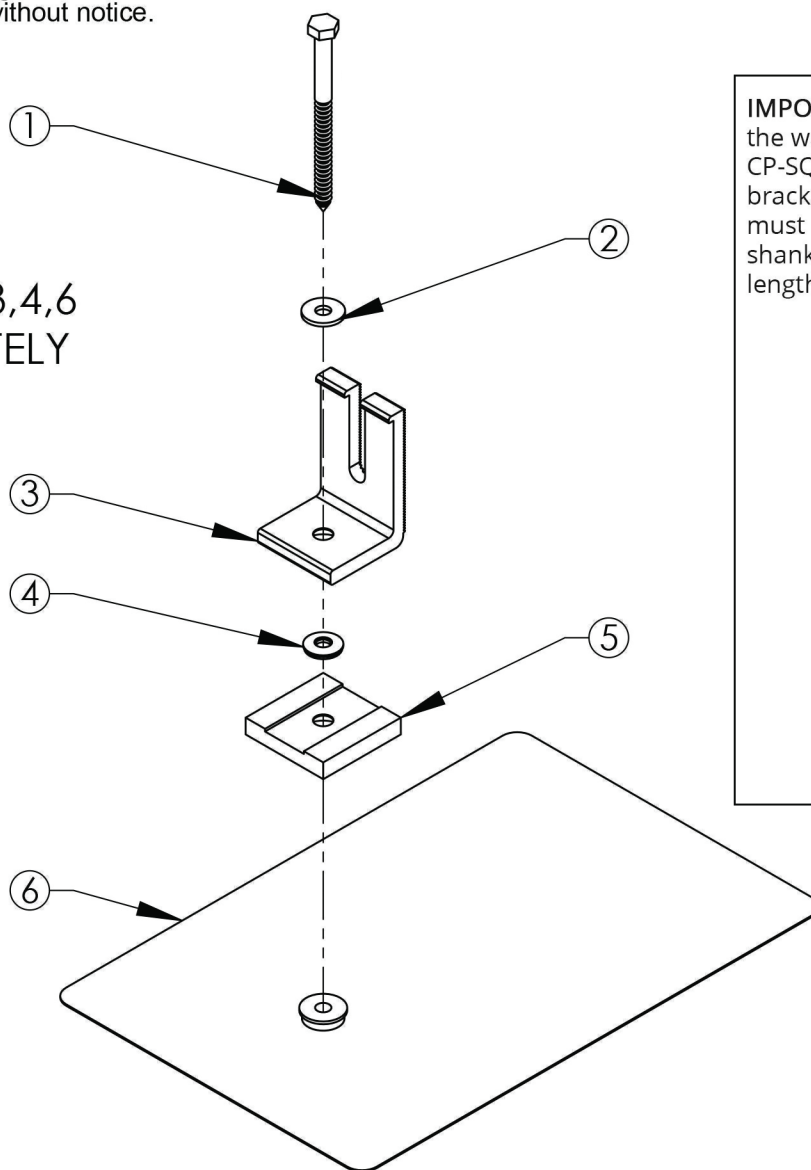

IMPORTANT: To maintain the watertight integrity of the CP-SQ-Slotted compression bracket, the fastener used must have a 5/16" diameter shank and minimum shank length of 3/4"

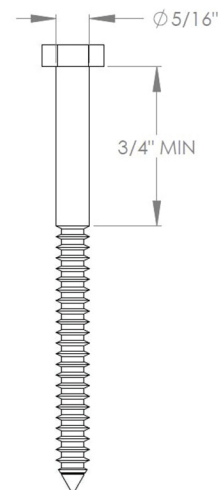

ITEM NO.	PART CODE	DESCRIPTION	QTY
1	B-LAG SS-.313X4	Stainless Steel Lag Screw .313x4	**
2	W-FLT NEO-.313	Neoprene Flat Washer .313 ID	1
3	Mounting Bracket	Mounting Bracket (Sold Separately)	**
4	W-NEO SS-.313	Stainless Steel EPDM Bonded Washer .313 ID	**
5	CP-SQ-SLOTTED	2x2" Slotted square adaptor plate, Al	1
6	GF1-BLK-812	GreenFasten AL Flashing Matte Black 8"x12"	**



Toll Free Phone 1.888.766.4273
Toll Free Fax 1.888.766.9994



Toll Free Phone 1.877.859.3947
Toll Free Fax 1.888.766.9994

289 Harrel Street
Morrisville, VT 05661

Material: See Spec Sheet

Scale: 2:7

5/20/2016

ASG: -

EFS: X