




NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00284 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

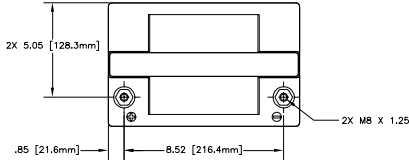

REFERENCE VIEW

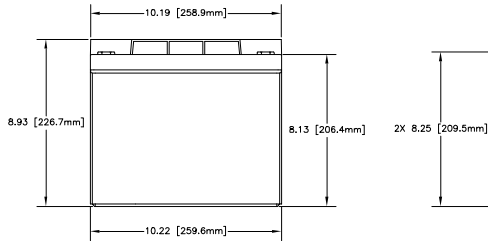

CAPACITY RATINGS		
PART NUMBER	PVX-690T	PVX-840T
NOMINAL WEIGHT	51 LBS [23.2 KG]	57 LBS [25.9 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77F (25°C)	69 AH	84 AH

ENVELOPE DRAWING

DWT SIZE		DATE CODE	DATE OF EXPIRING	MANUFACTURE OR DISCONTINUED		SERIAL SPECIFICATION		REV	
PARTS LIST						CONCORDE BATTERY CORPORATION			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES UNLESS OTHERWISE INDICATED		CONTRACT NO.		2009 SAN BERNARDINO RD., W. COVINA, CA 91790					
FRACTIONS DECIMALS ANGLES	APPROVALS		DATE	TITLE					
1/32 1/16 1/8 1/4 1/2 3/4 1 1 1/2	ELH		8/13/01	BATTERY, SLA, 12 VOLT, PVX-840T SERIES					
DECIMALS NONE	CHECKED	DATE	REV						
FRESH NONE	APPROVED	8/23/01	C 63017						
SIMILAR TO NO.	DATE	BY	AT	SCALE	DWG NO.		REV		
	8/24/01			NONE	PVX-840T		1 OF 1		