


IPN Remote

Monitoring parameters

Marine | RV

IPN Remote display provides basic monitoring for IPN compatible charge controllers from Blue Sky Energy. Monitor battery voltage, output current, and charge control system status for up to 8 charge controllers on a single IPN network. The bright, crisp LED screen reports battery voltage for each controller or across the whole system and provides excellent readability in all lighting conditions. Monitor charge status with simple and intuitive LED indicator. Multiple IPN Remote displays can be used with same system and along with an IPN ProRemote.

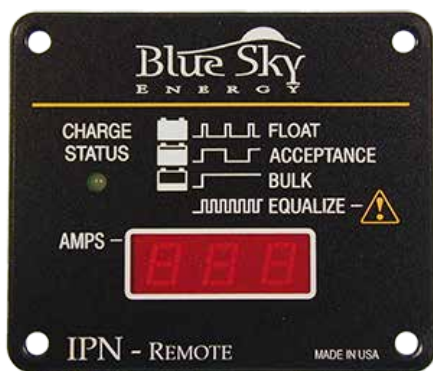

- Remote Display
- Monitoring parameters
- Flush mounting
- Easy to install



Product Features

- Check your system on the bright, crisp LED display
- Monitor charge status with an intuitive LED indicator
- Resists corrosion with conformal coating

Charge Controller Monitoring

- Total load output current of all charge controllers
- Individual load output current for each charge controller

Battery Monitoring

- Battery voltage
- Output current for single charge controller

IPN Compatibility

- SB1524iX, SB2512i(X)-HV, SB3024(D)iL in IPN network
- SB3000i only as master

Specifications:

IPN Remote

Power Consumption:	0.25W (typical standby), 1.0W backlit ON
Display:	3-Digit • 0.30" Low Power LED
Communication and Cabling:	Communication via 25' (7.6m) RJ-11 4-pin telephone cable provided
Operating Temperature:	-40°C – 40°C
Environmental Protection:	IP00
Weight:	0.017 lb. (42 g)
Dimensions:	2.9 x 2.45 x 0.9" (7.4 x 6.2 x 2.3 cm)
Warranty:	5 years (Tech. Bulletin #100218)
Certifications:	