


THE NEW VALUE FRONTIER



# KC130TM

HIGH EFFICIENCY  
MULTICRYSTAL  
PHOTOVOLTAIC  
MODULE

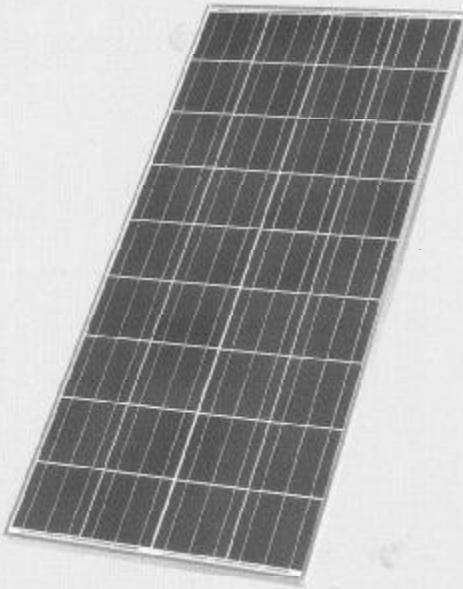

## HIGHLIGHTS OF KYOCERA PHOTOVOLTAIC MODULES

Kyocera's advanced cell processing technology and automated production facilities produce a highly efficient multicrystal photovoltaic module.

The conversion efficiency of the Kyocera solar cell is over 16%.

These cells are encapsulated between a tempered glass cover and a pottant with back sheet to provide efficient protection from the severest environmental conditions.

The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation.

## APPLICATIONS

- Microwave/Radio repeater stations
- Electrification of villages in remote areas
- Medical facilities in rural areas
- Power source for summer vacation homes
- Emergency communication systems
- Water quality and environmental data monitoring systems
- Navigation lighthouses, and ocean buoys

- Pumping systems for irrigation, rural water supplies and livestock watering
- Aviation obstruction lights
- Cathodic protection systems
- Desalination systems
- Railroad signals
- etc.

## QUALIFICATIONS

### ■ MODULE

UL1703 certified

Hazardous Locations Class I, Div 2, Groups A, B, C and D

### ■ FACTORY

ISO9001 and ISO14001

## PERFORMANCE WARRANTY

1 year limited warranty on material and workmanship

25 year<sup>#</sup> limited warranty on power output


## SPECIFICATIONS

### ■ Electrical Specifications

MODEL	KC130TM
Maximum Power	130Watts
Tolerance	+10% / -5%
Maximum Power Voltage	17.6Volts
Maximum Power Current	7.39Amps
Open Circuit Voltage	21.9Volts
Short-Circuit Current	8.02Amps
Length	1425mm (56.1in.)
Width	652mm (25.7in.)
Depth	58mm (2.3in.)
Weight	11.9kg (26.8lbs.)

### ■ Physical Specifications

(Unit: mm)

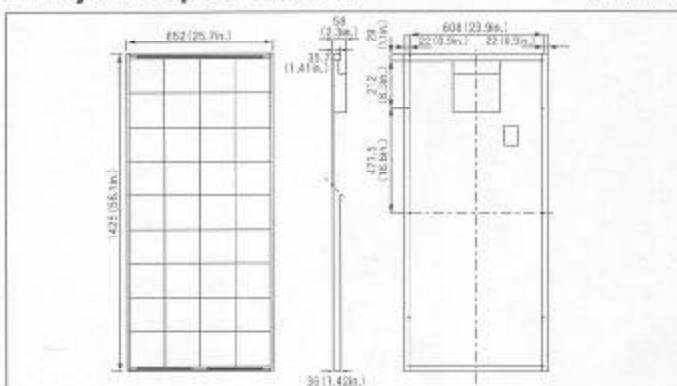

### ■ Thermal parameters


Nominal Operating Cell Temperature	47°C
Isc Current temperature coefficient	(3.18 × 10 <sup>-3</sup> ) A/°C
Voc Voltage temperature coefficient	(-8.21 × 10 <sup>-2</sup> ) V/°C

Note: The electrical specifications are under test conditions of irradiance of 1kw/m<sup>2</sup>, Spectrum of 1.5 air mass and cell temperature of 25°C


\*(Long term output warranty shall guarantee that loss of output is not more than 10% of the minimum warranty value of the product specifications within 12 years and is not more than 20% within 25 years after the purchase of the product by customer. The output values shall be those measured under Kyocera standard

## ELECTRICAL CHARACTERISTICS

Current-Voltage characteristics of Photovoltaic Module KC130TM at various cell temperatures

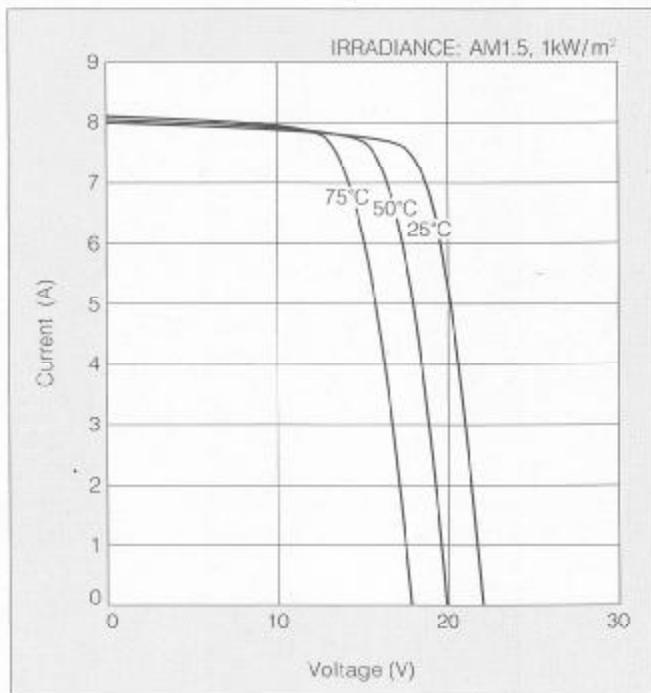

Current-Voltage characteristics of Photovoltaic Module KC130TM at various irradiance levels

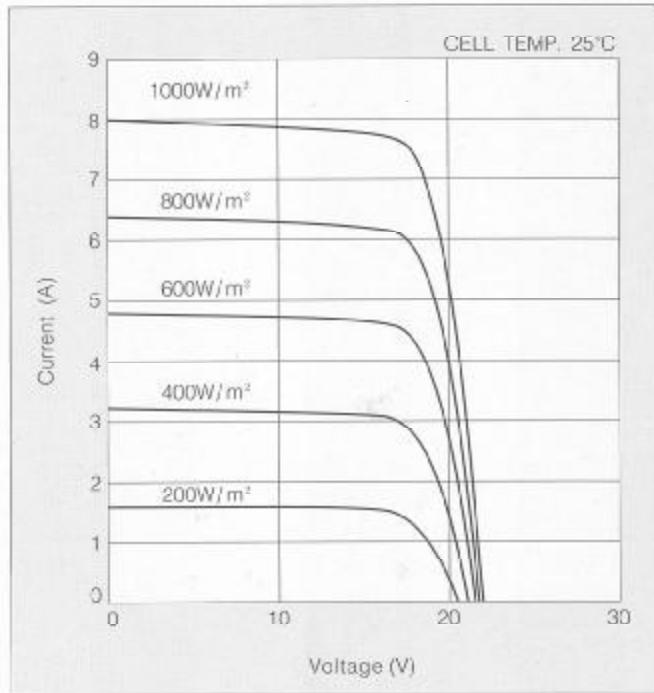

## QUALITY ASSURANCE

Kyocera multicrystal photovoltaic modules have passed the following tests.

- Thermal cycling test
- Thermal shock test
- Thermal/ Freezing and high humidity cycling test
- Electrical isolation test
- Hail impact test
- Mechanical, wind and twist loading test
- Salt mist test
- Light and water-exposure test
- Field exposure test

Please contact our office to obtain details without hesitation.



**KYOCERA Corporation**

### ■ KYOCERA Corporation Headquarters

CORPORATE SOLAR ENERGY DIVISION  
6 Takeda Tobadono-cho  
Fushimi-ku, Kyoto  
612-8501, Japan  
TEL:(81)75-604-3476 FAX:(81)75-604-3476  
<http://www.kyocera.com>

### ● KYOCERA Solar, Inc.

7812 East Acoma Drive  
Scottsdale, AZ 85260, USA  
TEL:(1)480-948-6003 or (800)223-9580 FAX:(1)480-483-6431  
<http://www.kyocerasolar.com>

### ● KYOCERA Solar do Brasil Ltda.

Energia Renovavel LTDA,  
Rua Mauricio da Costa Faria, 85  
22700-200, Recreio, Rio da Janeiro, Brazil  
TEL:(55)21-2437-8525 FAX:(55)21-2437-2338  
<http://www.kyocerasolar.com.br>

### ● KYOCERA Solar Pty Ltd.

Level 3, 6-10 Talavera Road, North Ryde  
N.S.W. 2113, Australia  
TEL:(61)2-9870-3948 FAX:(61)2-9888-9588  
<http://www.kyocerasolar.com.au/>

### ● KYOCERA Fineceramics GmbH

Fritz Muller strasse 107, D-73730 Esslingen, Germany  
TEL:(49)711-9393417 FAX:(49)711-9393450  
<http://www.kyocerasolar.de/>

### ● KYOCERA Asia Pacific Pte. Ltd.

293 Tiong Bahru Road, #13-03/05  
Central Plaza, Singapore 168730  
TEL:(65)6271-0500 FAX:(65)6271-0600

### ● KYOCERA Asia Pacific Ltd.

Room 803, Tower 1 South Seas Centre, 75 Mody Road,  
Tsui Shat Tsui East, Kowloon, Hong Kong  
TEL:(852)2-7237183 FAX:(852)2-7244501

### ● KYOCERA Asia Pacific Ltd. Taipei Office

10 Fl., No.66, Nanking West Road, Taipei, Taiwan  
TEL:(886)2-2555-3609 FAX:(886)2-2555-4131

### ● KYOCERA(Tianjin) Sales & Trading Corporation

Add:19F, Tower C HeQiao Building 8A GuangHua Rd.,  
Chao Yang District, Beijing 100026, China.  
TEL:(86)10-6583-2270 FAX:(86)10-6583-2250