REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00285 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

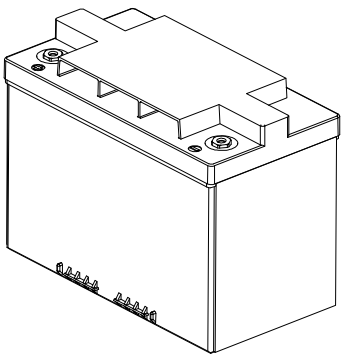

REFERENCE VIEW

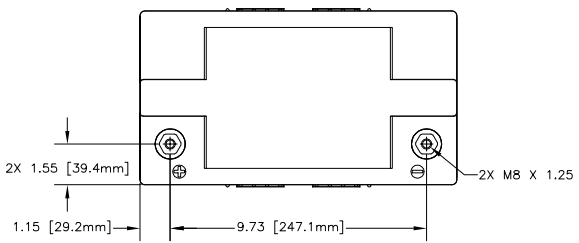

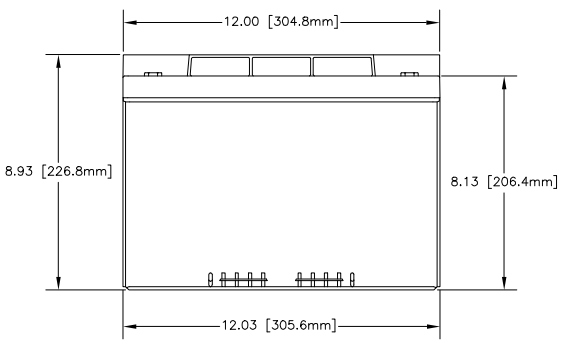

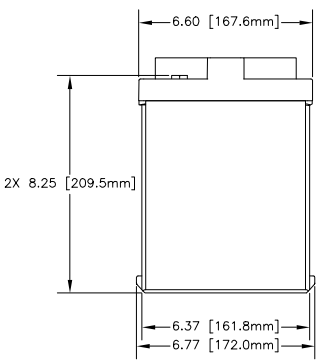

CAPACITY RATINGS	
PART NUMBER	PVX-1040T
NOMINAL WEIGHT	66 LBS [30 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	104 AH

ENVELOPE DRAWING

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS ± 1/32 | DECIMALS .XX ± .06, .XXX ± .030 | ANGLES ± 1°

TREATMENT: NONE
FINISH: NONE
SIMILAR TO: NA | ACT WT: NA | CALC WT: NA

CONTRACT NO.: NA

APPROVALS		DATE
DRAWN	ELH	8/13/01
CHECKED	HRF	8/21/01
APPROVED	JBT	8/23/01
ISSUED	AT	8/24/01

CONCORDE BATTERY CORPORATION
2009 SAN BERNARDINO RD. W. COVINA, CA 91790

TITLE: BATTERY, SLA, 12 VOLT, PVX-1040T

SIZE: C | CAGE CODE: 63017 | DWG NO.: PVX-1040T | REV:

SCALE: NONE | SHEET 1 OF 1

ENGINEERING COPY 24AUG01