





NOTES: UNLESS OTHERWISE SPECIFIED

- SEE DRAWING NO. CB-00292 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
- ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
- ALL DIMENSIONS ARE IN INCHES [MM].
- ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

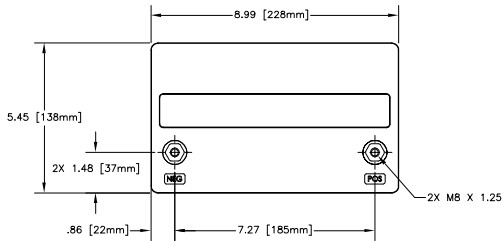

REFERENCE VIEW

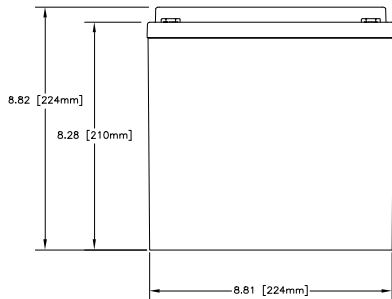

CAPACITY RATINGS

PART NUMBER	PVX-490T	PVX-560T
NOMINAL WEIGHT	36 LBS[16.4 KG]	40 LBS[18.2 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	49 AH	56 AH

ENVELOPE DRAWINGS

REV	DATE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			PARTS LIST		
FRACTIONS DECIMALS ANGLES			CONTRACT NO. NA		
1/16 .001 30°			DRAWER ELH DATE 8/13/01		
XXX .000			APPROVALS		
TOLERANCE .010			TITLE BATTERY, SLA, 12 VOLT, PVX-560T SERIES		
TREATMENT NONE CHECKED HRF 8/20/01			REV		
FINISH NONE APPROVED JST 8/23/01			REV C 63017 DWG NO. PVX-560T		
SCALE TO IN 1:1			SCALE NONE		
ISSUED AT 8/24/01			SHEET 1 OF 1		